


Data Sheet

6.5 Beaded • Board & Batten



Beaded Siding Panel 6.5" PSS65B__

Length 12' - 4" | 30 Panels/Ctn. | 2 Sq./Ctn. | Ctn. Weight: 97.47 lbs.

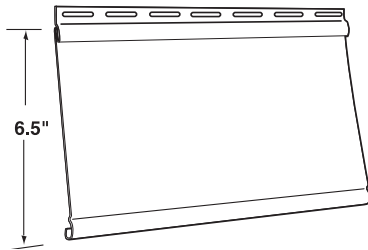


Color # | Color | Smooth Matte Finish _____

Standard	Premium	Elite
02 White Birch	41 Soft Willow	79 Seagrass
11 Classic Sand	43 Pebble Clay	80 Twilight
17 Warm Sandalwood	61 Artisan Clay	85 Keystone
22 Sunny Maize		86 Nutmeg
26 Summer Wheat		
44 Harbor Stone		

Board & Batten 7" Panel PSSBB__ | FULL Cartons Only

Length 10' - 0" | 17 Panels/Ctn. | 1 Sq./Ctn. | Ctn. Weight: 50.05 lbs.

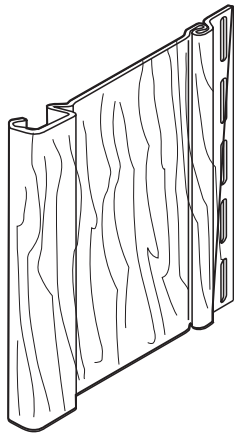

Color # | Color Deep Cedar Woodgrain Finish _____

Standard	Premium	Elite	Paramount
02 White Birch	41 Soft Willow	79 Seagrass	81 Canyon Brown
11 Classic Sand	43 Pebble Clay	80 Twilight	87 Heritage Red
17 Warm Sandalwood	49 Graphite Grey	85 Keystone	89 Hampton Blue
22 Sunny Maize	61 Artisan Clay	86 Nutmeg	90 Gray Flannel
26 Summer Wheat	82 Meadow		94 Mountain Pine
44 Harbor Stone			

POLARIS 6.5 Beaded | Board & Batten Vinyl Siding

SCI® Vinyl Siding meets or exceeds all industry standards per ASTM D3679.

Product Test Data

6.5 Beaded Thickness.....	.044" ± .001"	Surface Distortion @ 140°F.....	0
Board & Batten Thickness.....	.048" ± .001"	Flame Spread Index.....	10
Specific Gravity.....	1.45	Fire Rating	Class A
Tensile Strength (PSI).....	7,154	Smoke Developed.....	.395
Tensile Modulus (PSI).....	416,900	Fuel Contribution.....	0
IZOD Impact Strength @ 32°F.....	Passes per ASTM D3679	Average Time Of Burning.....	Self extinguished
Heat Deflection Temp. @ 264 PSI.....	169°F	Average Extent Of Burning.....	2.379 mm
Coefficient of Linear Expansion.....	3.30 x 10 ⁻⁵	Weathering.....	Passes per ASTM D3679
Warpage.....	0.00"	Impact Resistance.....	Passes per ASTM D3679
Heat Shrinkage.....	0.3%		