GRK RSS

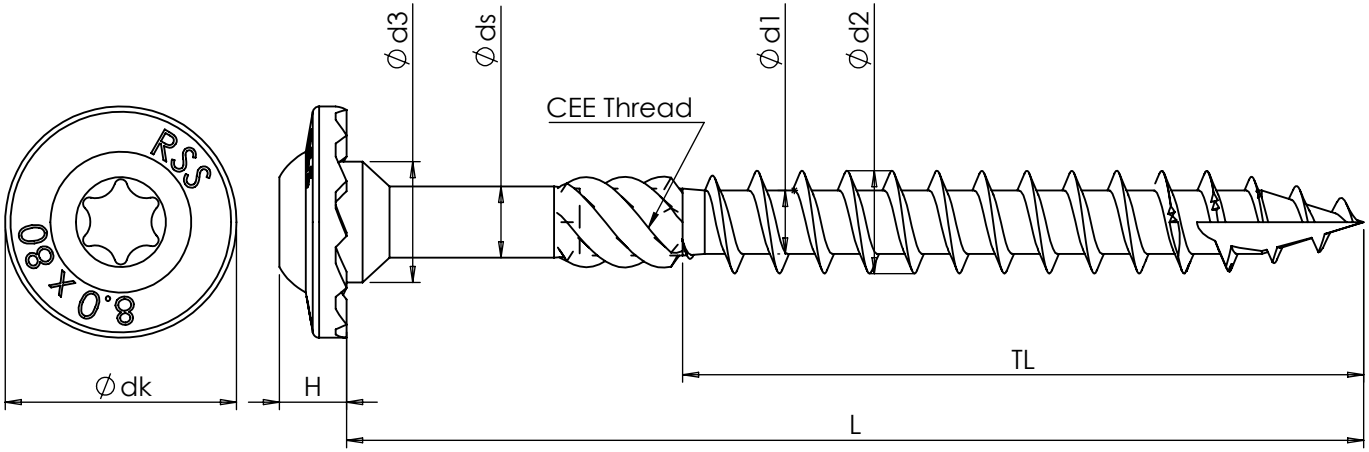

SIZE(Length)	Length (L)	Thread length (TL)
1-1/2	1.575	1.000
2"	2.000	1.299
2-1/2"	2.500	1.575
2-3/4"	2.750	1.811
3-1/8"	3.149	2.087
3-1/2"	3.543	2.362
4"	3.937	2.992
5-1/8	5.512	3.385
6"	6.300	4.000
7-1/4"	7.087	4.409
8"	7.875	
10"	9.842	5.000
12"	11.811	5.905
14-1/8"	14.173	
16"	15.748	

SIZE (Dia)	Head diameter (dk)	Head height (H)	Shoulder (d3)	Shank diameter (ds)	Minor diameter (d1)	Major diameter (d2)
#10	0.472	0.106	0.228	0.141	0.129	0.197
#1/4"	0.533	0.110	0.244	0.169	0.150	0.239
#5/16"	0.620	0.157	0.301	0.199	0.174	0.280
#3/8"	0.689	0.181	0.364	0.233	0.191	0.310

Dimensions are in inches without any manufacturing tollerances !
More technical info also avilable under ICC ESR # 2442
CEE thread starting on screws 3-1/8" and longer

#10 / # 1/4" have a T-25 Star drive.
5/16" have a T-30 Star drive.
3/8" have a T-30 Star drive.

Distribution Record	Headmark
ITW	

	NAME	DATE
DRAWN	S.Ruhmann	MARCH 27-2015
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Illinois Tool Works Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Illinois Tool Works Inc. IS PROHIBITED.

ITW GRKFASTENERS.COM ÜberGrade™

955 National Parkway,Suite
95500 Schaumburg,IL 60173
USA

DWG. NO. Sales Support RSS Screw

REV. 0

RSS

SHEET 1 OF 1